




Preparing to Use the 2-Part Epoxy Kit with a Mixing Nozzle

Requires:

1. Epoxy
2. Mixing Nozzle
3. Barrel
4. Plunger
5. Caulking Gun (not pictured)

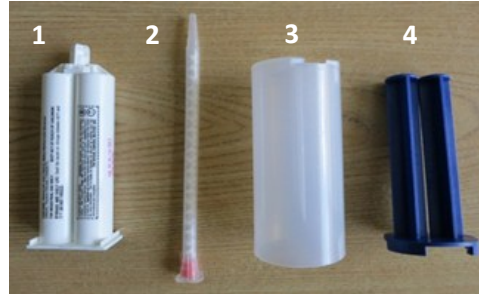

Plastic Welder 2-Part Epoxy begins to set up in 1-3 minutes.

Be sure your project is ready before opening the epoxy tube.

Step 1: Twist and remove epoxy tip.



Step 4: Insert epoxy, plunger, and barrel into caulking gun.



Step 2: Install mixing nozzle.



Step 5: Snip end of mixing nozzle high enough to allow good flow of epoxy.

Step 3: Insert epoxy tube into barrel.





Easy Spa Parts

We know what you need.

Applying Epoxy with a Mixing Nozzle

Step 1: Snip end of mixing nozzle.





Step 4: Remove mixing nozzle. Use a rag to wipe excess epoxy from tip of tube.



Step 2: Squirt a small amount of epoxy onto a paper plate to begin the process.



Step 5: When the tip is clean, reinstall the protective cap.

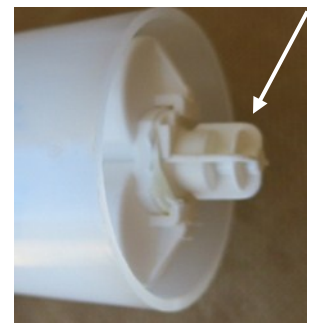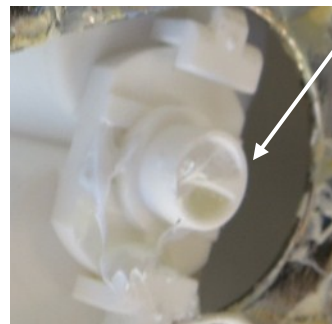

Step 3: Carefully apply the epoxy at the desired location.



These instructions are also on-line in color
at www.easyspaparts.com

Please call if you have any questions

866.418.1840 Toll Free